


SANYO

Cadnica

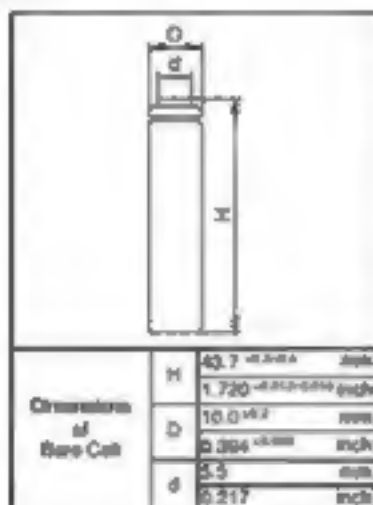


Cell Type N-250AAAC

Specifications


Nominal Capacity		250mAh				
Nominal Voltage		1.2V				
Charging Current	Standard	25mA				
	Quick	75mA				
	Fast	375mA				
Charging Time	Standard	14 to 16Hrs.				
	Quick	4 to 6Hrs.				
	Fast	about 1Hr.				
Ambient Temperature	Charge	Standard	0°C to +45°C	+32°F to 113°F		
		Quick	10°C to +45°C	+50°F to 113°F		
		Fast	0°C to +45°C	+32°F to 113°F		
	Discharge		-20°C to +60°C	-4°F to 140°F		
	Storage		-30°C to +50°C	-22°F to 122°F		
Internal Impedance (Av.) (at 50% discharge)		24.0mΩ (at 1000Hz)				
Weight		11g/0.39oz				
Dimensions(D)×(H) (with tube)		10.5	$\frac{4}{16}$	× 44.4	$\frac{9}{16}$	mm
		0.41	$\frac{4}{16}$	× 1.75	$\frac{9}{16}$	inch

Typical Characteristics


Charge

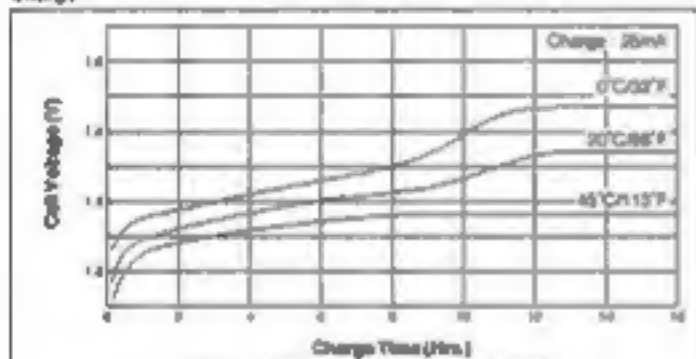


Discharge (at high rate)

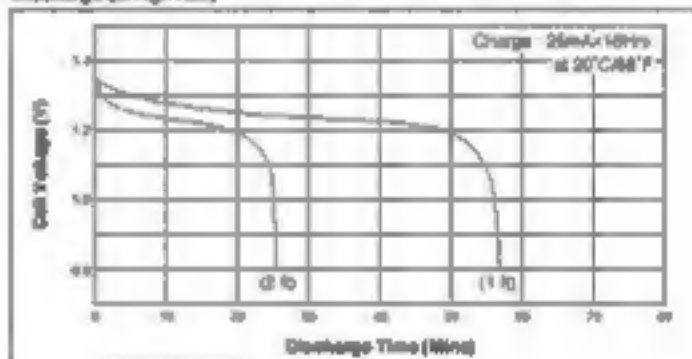


Charge

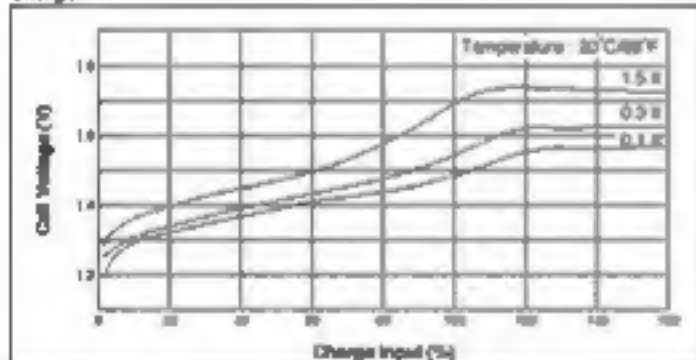

Discharge (at high rate)

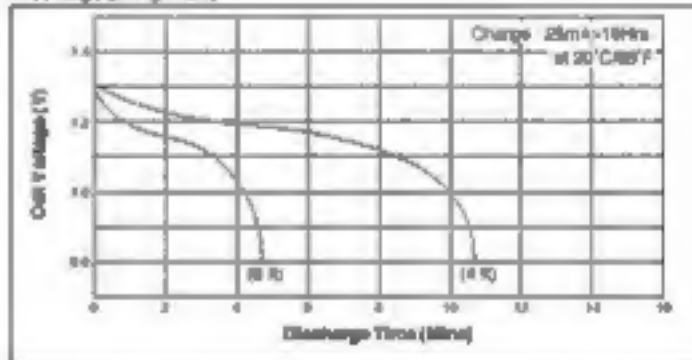

Discharge (at low rate)

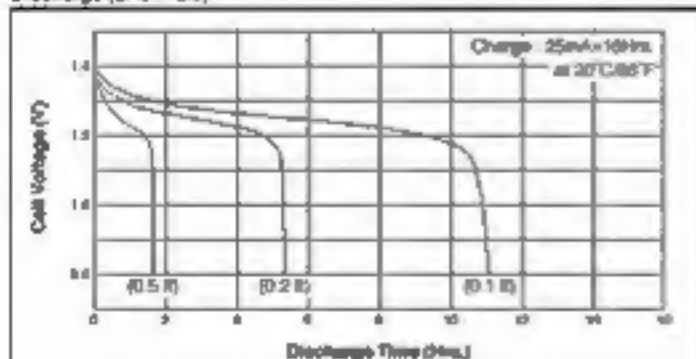

Temperature (Charge & Discharge)

